

Accessorize your kiln

Optional equipment to get the most from your kiln

NEW! THE LID LIFTER



■ All 10 and 12-sided models now come standard with a lid lifter. The lid lifter makes opening your lid safe and effortless. The Lid Lifter also comes standard with a 3 position lid prop and 2 position lid

brace for added safety and convenience. Lid lifter upgrade kits are also available to easily install on older models.

NEW! EASYVIEW



■ Angled touchpad mount for easy viewing and programming. Can be ordered with a new kiln or as an upgrade to an existing kiln. Installs in minutes. Available for all Kiln-Master kilns.

COMPUTER INTERFACE SYSTEM



■ This system allows you to program, monitor and graph the firings of up to 10 Kiln-Master controlled kilns using a PC. Installation is simple and quick. The system includes a CD with the software and all of

the necessary hardware to connect your computer to the KM controller.

■ The EnviroLink allows you to program the controller to automatically turn the vent on and off throughout a firing program. You simply enter an on/off setting for each segment of a Ramp and Hold program while you are programming the kiln. There are preset "vent programs" that can be run in conjunction with a ConeFire Mode or Glass-Fire Mode program as well.

FURNITURE KITS



■ A furniture kit is used to create shelf layers inside your kiln. Although the contents of shelf kits vary depending on the kiln model, all shelf kits will contain a selection

of shelves and 1 or more post assortment kits. Furniture kits for kilns with 8 sides or less will come with 18 posts, 3 each in lengths 1 through 6. Kits for larger kilns will come with 36 posts. All furniture kits are designed to fire to Cone 10 temperatures.

Model	Kit Includes
1627	(8) 1 1227 half shelves, (8) 1x13x16 shelves, (5) Small Post Assortment Kits
1231/1227	(8) 1 half shelves, 1 Large Post Assortment
1218	(6) 1 half shelves, 1 Large Post Assortment
1027	(8) 5/8 half shelves, 1 Large Post Assortment
1018	(6) 5/8 half shelves, 1 Large Post Assortment
818	(2) 5/8 full shelves, (3) 5/8 half shelves, 1 Small Post Assortment
714	(1) 5/8 full shelf, (1) 5/8 half shelf, 1 Small Post Assortment
614-3	(1) 5/8 full shelf, (1) 5/8 half shelf, 1 Small Post Assortment
609	(1) 5/8 full shelf, (1) 5/8 half shelf, 1 Small Post Assortment

REPLACEMENT PARTS

■ All replacement parts are available for purchase through your distributor. Overnight delivery is available for most items.

THE ENVIROVENT 2



■ **REMOVES FUMES, ODORS AND VAPORS.** Particularly useful when firing materials such as lusters, metallics and high sulfur clays, which can emit strong odors.

■ **IMPROVES FIRING CONSISTENCY.** The vent also helps to prevent different color glazes from migrating. You can now fire greens and reds on the same shelf with excellent results.

■ **FITS POPULAR KILNS.** The EnviroVent 2 fits Skutt 12, 10, and 8-sided kilns, as well as many other kiln brands.


■ **IDEAL FOR AUTOMATIC KILNS.** The EnviroVent 2 makes firing kilns such as the Skutt KM series much more convenient. There's no lid propping. Just put plugs in all the peepholes and press START.

■ **BETTER THAN HOODS.** The EnviroVent 2 pulls fumes from the kiln before they can enter the room. It's compact and unobtrusive—no pulleys, no counterweights, no overhead installation. Flexible ducting lets you move kilns around the room. And the air-cooled motor will not overheat from normal firings.

■ **CERTIFIED SAFE.** The EnviroVent 2 is UL listed when installed with a Skutt kiln bearing the UL mark and meets standard building codes in most jurisdictions.

■ **EASY TO INSTALL.** The Envirovent 2 is easy to install on new or existing kilns. The kit includes everything you need for a floor or wall mounted installation. We can drill the venting holes in the factory when the kiln is ordered or they can be easily drilled on site. We even give you the drill bit. Vent through the roof or the wall of your kiln room.

■ **WON'T LEAK.** The Spring-loaded plenum cup ensures a tight seal as the kiln heats up. The floor of the kiln actually cups when the kiln is fired causing competitive brands to quit drawing air.




■ **MEETS CODE.** The new wall mounted EnviroVent 2 design is a Negative Pressure System which prevents fumes from leaking into the room if the duct is damaged. Negative pressure systems are required by some local building codes. Mounting the motor away from the kiln protect it from heat and prevents vibration from transferring to the kiln.

■ **VENT 2 KILNS.** With the addition of the Dual Intake Kit you can vent 2 kilns under 12 cubic feet each with 1 motor or any kiln up to 24 cubic feet.

VENT ACCESSORIES.

- EnviroLink
- Dual Intake Kit: Allows for ducting 2 kilns or kilns over 12 cubic feet (up to 24 cubic feet)
- Extension Kit: Additional 8 feet of ducting with clamps

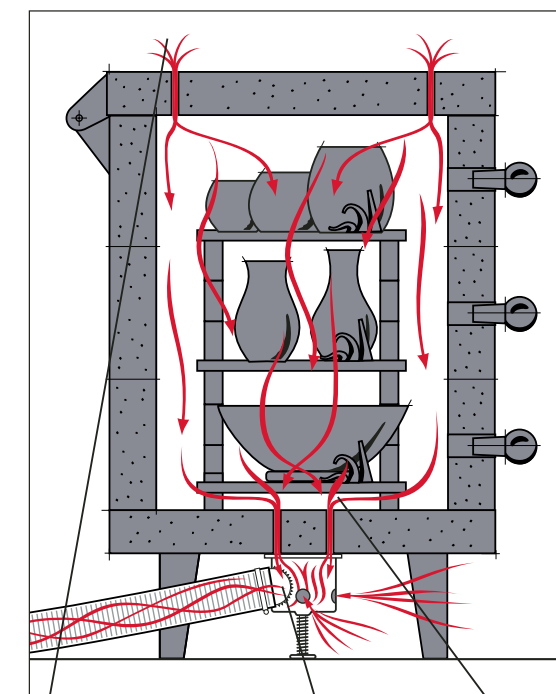

Small amount of air enters at top of kiln.

Fumes, odors and vapors are diluted with cool air and exit to the outside atmosphere.

Negative pressure in the plenum chamber, creates a downdraft.